



150L

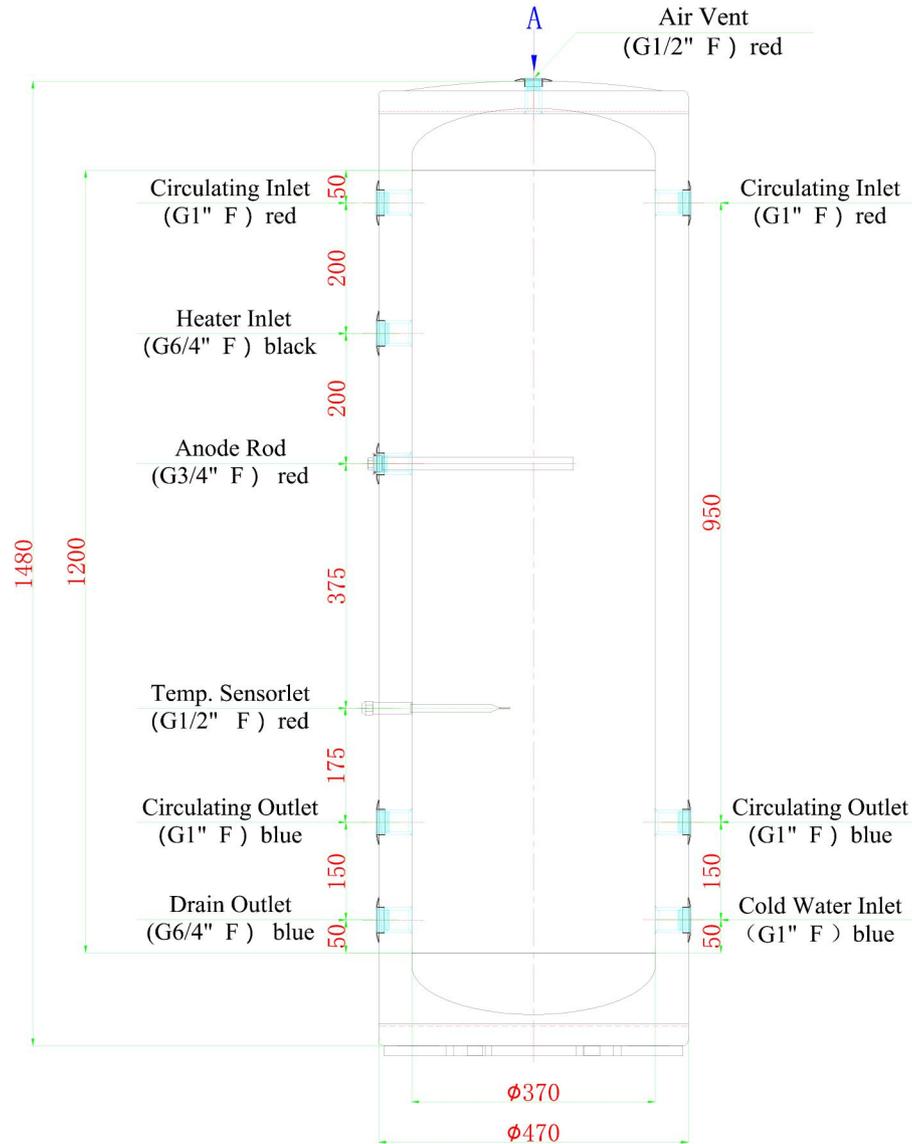

Top view rod

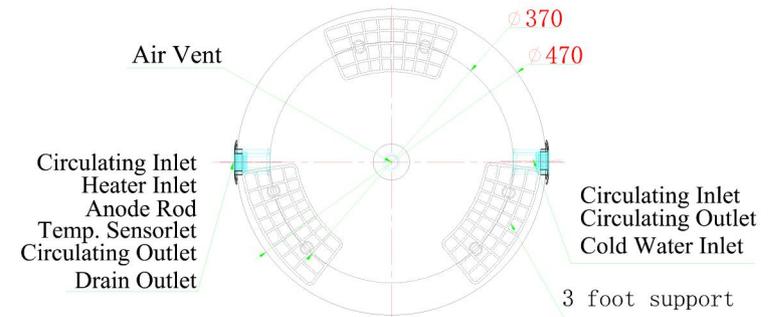

Technical Requirement:

1. The welding should be plump, glossy, firm and without welding fault.
2. The test pressure of inner tank is 1.0Mpa and keep 5 minutes without decline. The appearance don't change.
3. The material and thickness of shell is PCM Color Steel Shell (golden/silvery/white) / 304 stainless steel and 0.5mm.
4. The material and thickness of inner tank is 304 stainless steel and 1.2mm.
5. Anode Rod : $\Phi 20 \times 300$ mm.
6. The surface of tank should be smooth and without scratch and forming leak.
7. Attachment: G1"(0.8Mpa) P Relief Valve: 1pc, foot support: 3pcs.