



# 300L

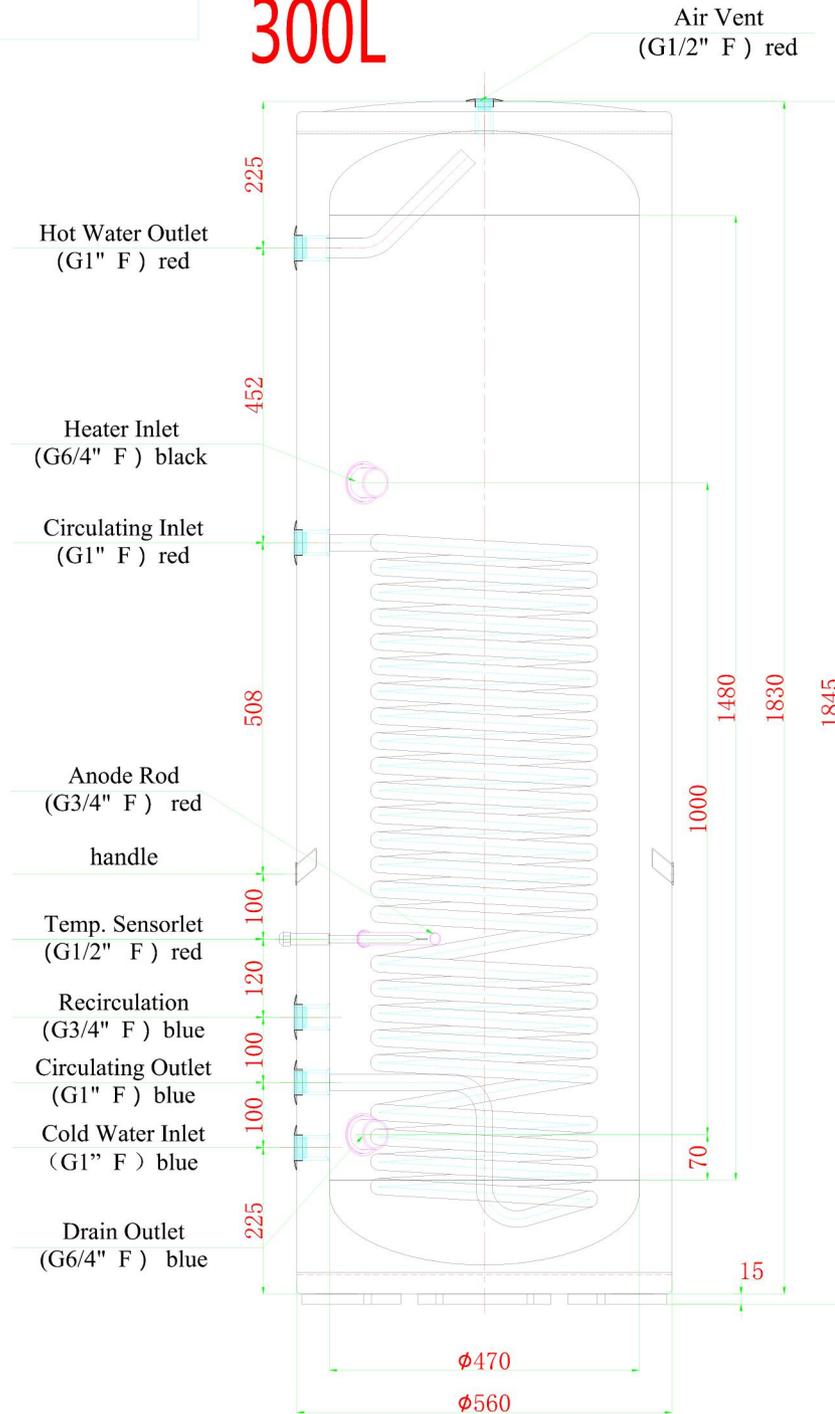

### Top view

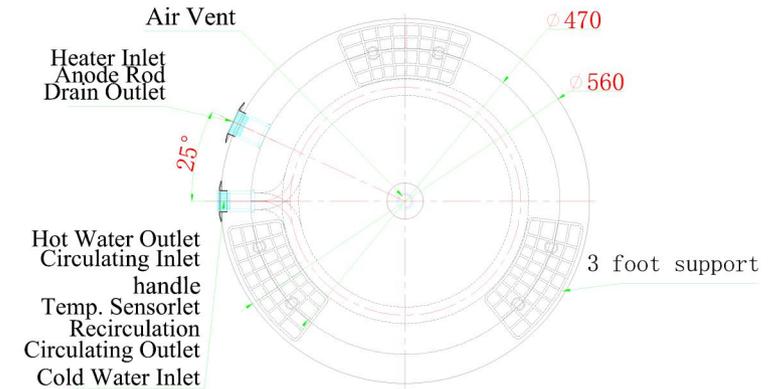

#### Technical Requirement:

1. The welding should be plump, glossy, firm and without welding fault.
2. The test pressure of inner tank is 1.0Mpa and keep 5 minutes without decline. The appearance don't change.
3. The material and thickness of shell is PCM Color SteelShell (golden/silvery/white) / 304 stainless steel and 0.42mm.
4. The material and thickness of inner tank is 304 stainless steel and 1.5mm.
5. Heat exchanger coil: SUS304 stainless steel corrugated coils,  $\phi 25 \times 0.3 \text{mm} \times 25 \text{m}$ ; Heat exchange area:  $2.88 \text{m}^2$ .
6. The test pressure of Heat exchange coil is 1.2Mpa and keep 10 minutes without decline. The appearance don't change.
7. Anode Rod :  $\phi 20 \times 300 \text{mm}$ .
8. The surface of tank should be smooth and without scratch and forming leak.
9. Attachment: G1"(0.8Mpa) relief valve: 1pc, foot support: 3pcs.